MINIBANK





NECTA

SNAKKY - KIKKO



Master: Snakky or Kikko Payment operations: on master machine Keypad selection for Snacks, Cans & Bottles Direct selection for Hot & Cold Drinks
Connection kit required

> Master: Kikko Kikko for payment operations Direct selection for Hot & Cold Drinks Selection for Snacks, Cans & Bottles on the keypad fitted to the Kikko No connection kit required

SNAKKY SL - KIKKO



SNAKKY SL - SNAKKY - KIKKO



Master: Snakky Snakky for payment operations Keypad selection for Snacks, Cans & Bottles Connection kit required

Master: Snakky Master: Snakky
Snakky for payment operations
Keypad selection for Snacks, Cans & Bottles
Direct selection for Hot & Cold Drinks
Connection kit required



SNAKKY SL - SNAKKY SL - SNAKKY



Master: Kikko Kikko for payment operations Direct selection for Hot & Cold Drinks

Selection for Snacks, Cans & Bottles on the keypad fitted to the Kikko

Snakky for payment operations Keypad selection for Snacks, Cans & Bottles Two connection kits required












N&W GLOBAL VENDING S.p.A. Via Roma 24, 24030 Valbrembo (BG) Italy

Ph. +39 035 606111 - Fax +39 035 606519

www.nwglobal vending.com

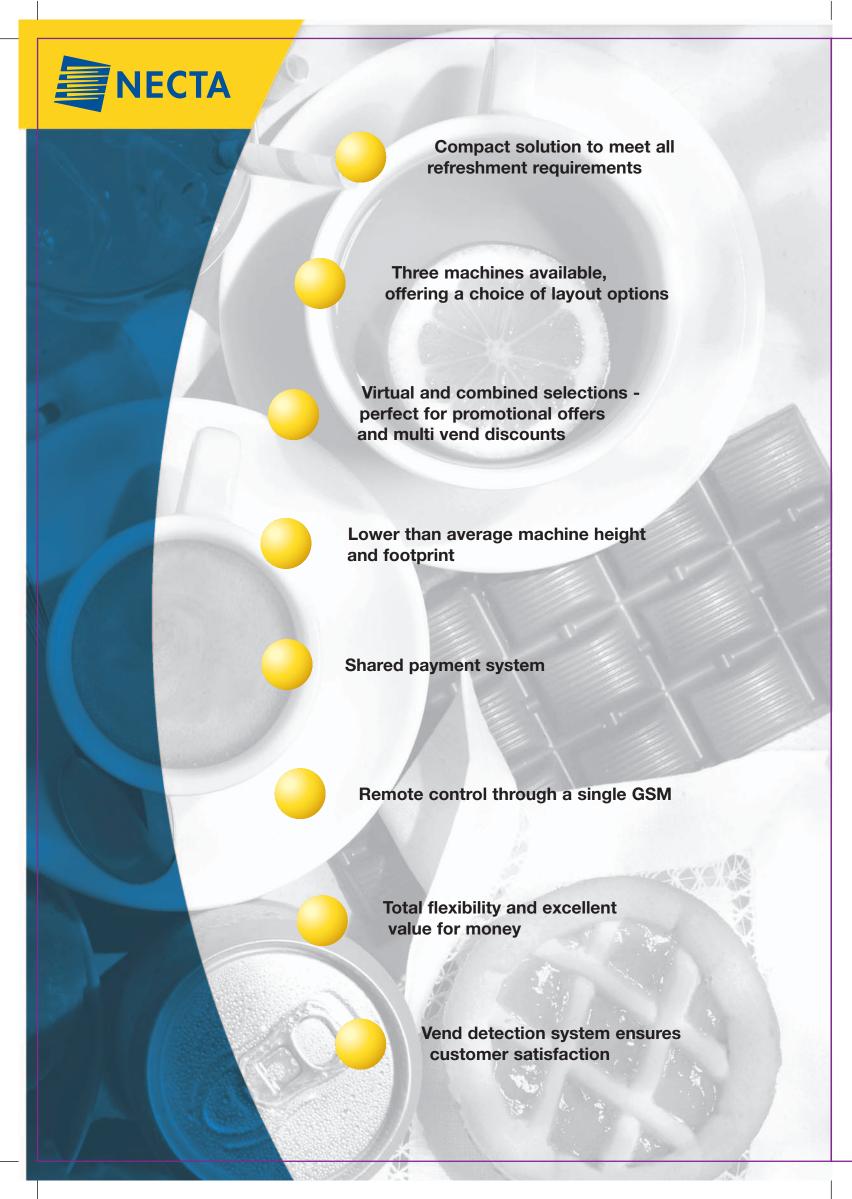

MINIBANK

The Minibank offers a compact solution to meet all your refreshment requirements. There are three machines available - Kikko hot drinks (cold water option), Snakky or Snakky SL - offering a choice of layout options to suit a wide range of sites.

Snakky and Kikko can act as a host or slave, however, the Snakky SL has been designed to act as a slave only. A host can manage up to two slave machines and share one payment system. As the Snakky SL does not have its own keypad, a keypad is supplied with the Snakky SL (same features as Snakky without user interface), which can be fitted to the Kikko host.

Additional features such virtual and combined selections make it simple to set up promotional offers and multi vend discounts. To ensure multivend items are not damaged, the selection numbers can be programmed with a product dispensing sequence e.g. no bottle after crisps. A vend sensor can be fitted on the snack machine to ensure customer satisfaction. In the event of a failed vend, the user does not lose the inserted money as the spiral will retry dispensing the product. If unsuccessful, a second selection can be made or money returned (*).

All of this from a bank of machines with a very compact footprint and lower than average height, the Minibank offers flexibility and excellent value.

The keypad can be programmed with one number to allow the following:

- Spiral selections working in FIFO mode
 1 item from the Snakky or Snakky SL
- Virtual selection Two different items from the Snakky or Snakky SL e.g. 1 x confectionery & 1 x snack
- Combined selection Two different items from the Snakky or Snakky SL plus
 1 x drink from the Kikko e.g. 1 x confectionery, 1 x tetrapak & 1 x hot drink

4 direct selection buttons available as a kit for promoting brand products, virtual/combined selections and FIFO selections (machine empties evenly, the front of the machine always looks full and products are sold at the right temperature).

(*) HOW THE VEND DETECTION SYSTEM WORKS WITH VIRTUAL AND COMBINED SELECTIONS

- If the payment system is a validator or works with MDB protocol, the machine will dispense the first product and give back the money corresponding to the difference between the price of the virtual/combined selection and the price of the single product dispensed.
- If the payment system works with BDV or EXE protocol, the operator can choose to give the money back for the price of the complete virtual/combined selection or to keep all the money.

In both cases, the selection that did not work and the corresponding virtual/combined selections are then disactivated.



SPECIFICATION	Snakky SL	Snakky	Kikko	
Height	1700 mm	1700 mm	1700 mm	
Width	607 mm	707 mm	540 mm	
Depth	800 mm	860 mm	690 mm	
Depth (with door open)	1335 mm	1335 mm	1120 mm	
Net Weight	165 kg	190 kg	115 kg	
Versions	Snack Snack+C&B C&B	Snack Snack+C&B	Espresso - Instant	
Communication protocols	Executive and MDB			
Absorbed power	345 W		1800 W	
Power supply voltage		230 V - 50 Hz		
See Kikko & Snakky brochures for further details				

For all combinations (except Kikko + Snakky SL) a connection kit with cables and mechanical connection device is necessary.